



CHEMICAL PUMP & FILTER
WITH ACID-ALKALI RESISTANCE
EXPERT IN R&D AND MANUFACTURING

Stainless Steel Vertical Pump

Model : QHV

GUANGDONG QEEHUA INDUSTRY EQUIPMENT CO., LTD.



Workshop &
Warehouse



Stainless Steel Verticle Pump [QHV Series]



Product Specification List

Model	Inlet & Outlet Size	Power HP	Power KW	Max. Head (50Hz)(m)	Max. Flow(50Hz)		Motor Speed R/MIN
					(L/min)	(m ³ /h)	
QHV-25SK-0.5	DN25	0.5	0.37	11.5	100	6	2850
QHV-25SK-1	DN25	1	0.75	11.5	150	9	2850
QHV-40SK-1	DN40	1	0.75	11.5	200	12	2850
QHV-40SK-2	DN40	2	1.5	17	300	18	2850
QHV-50SK-2	DN50	2	1.5	17	366	22	2850
QHV-50SK-3	DN50	3	2.2	17	416	25	2850
QHV-50SK-5	DN50	5	4.0	23	600	36	2850
QHV-65SK-3	DN65	3	2.2	17	483	29	2850
QHV-65SK-5	DN65	5	4.0	23	666	40	2850
QHV-80SK-7.5	DN80	7.5	5.5	27	800	48	2850
QHV-80SK-10	DN80	10	7.5	27	933	56	2850
QHV-100SK-7.5	DN100	7.5	5.5	23	1666	100	2850
QHV-100SK-10	DN100	10	7.5	27.5	1666	100	2850
QHV-100SK-15	DN100	15	11	31	1800	108	2850
QHV-100SK-20	DN100	20	15	31	2100	126	2850
QHV-125SK-15	DN125	15	11	22.5	2633	158	2850
QHV-125SK-20	DN125	20	15	27	2633	158	2850


● Medium temperature: 0 °C~+180 °C, medium specific gravity: 1~2, working environment temperature: -5 °C~+50 °C, maximum operating altitude: 2000m, maximum working pressure: 10Bar, Test basis: The above performance data corresponds to the normal speed of transportation of clean water at 25 °C. The performance error is ± 5%. The performance of a pump varies with the specific gravity and temperature of the fluid medium being transported.

Model Description


QHV - 40 - SK - 1 - 5 - P - S4 - V38 - K - A - B - S

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

- ① Model No.: QHV
- ② Inlet And Outlet Caliber: 25-1 "; 40-1.5 "; 50-2 "; 65-2.5 "; 80-3 "; 100-4 "; 125-5 "
- ③ Specific Gravity Of Liquid: SK-1. 0-1.2; SB-1. 3; SC-1. 4; SD-1. 5; SE-1. 6; SF-1. 7; SG-1. 8; SH-1. 9; SI-2. 0
- ④ Power: 1/2-1/2 HP; 1-1HP; 2-2HP; 3-3HP; 5-5HP; 7.5-7.5 HP; 10-10HP; 15-15HP; 20-20HP; 25-25HP
- ⑤ Frequency: 5-50HZ; 6-60HZ
- ⑥ Sealing Material: P-PTFE
- ⑦ Pump Body Material: S4-SUS304; S6-SUS316
- ⑧ Voltage: Voltage: V38-3Ø/380V; V41-3Ø/415V; V44-3Ø/440V; V 48-3Ø/480V; V66-3Ø/660V; V32-3Ø/220V; V22-1Ø/220V
- ⑨ Motor Brand: G-Kingdom; K-Kailida; Q-Other
- ⑩ Motor Requirements: A-IE3 Normal Motor; B-IE4 Normal Motor; C-IE5 Normal Motor; D-Variable Frequency Motor; E-IE3, BT4 Ex-Proof Motor; F-IE4, BT4 Ex-Proof Motor; G-IE5, BT4 Ex-Proof Motor; H-IE3, CT4 Ex-Proof Motor; I-IE4, CT4 Ex-Proof Motor; J-IE5, CT4 Ex-Proof Motor; K-Permanent magnet variable frequency motor; L-BT4 Ex-Proof Variable Frequency Motor; M-CT4 Ex-Proof Variable Frequency Motor
- ⑪ Motor Protection Level: A-IP54; B-IP55; C-IP56; D-IP65
- ⑫ S-Standard; N-Non-Standard

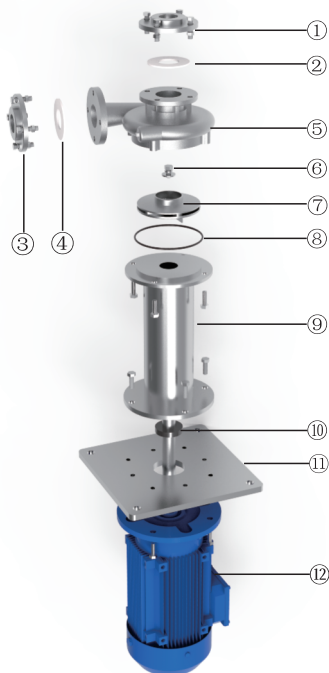

- ① Inlet Flange
- ② Inlet Gasket
- ③ Outlet Flange
- ④ Outlet Gasket
- ⑤ Front Cover
- ⑥ Impeller Nut
- ⑦ Impeller
- ⑧ Cover O-Ring
- ⑨ Pump Body
- ⑩ Oil Seal
- ⑪ Motor Base
- ⑫ Motor

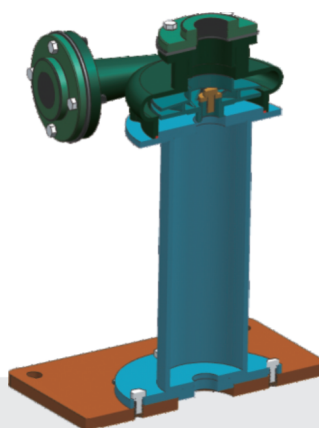

Product Characteristics

1. It is made of 304 or 316 stainless steel by virtue of casting molding, with compact and firm structure.
2. The design of non-shaft seal, and it will not burn out because of idling.
3. It is suitable for all kinds of acid alkali solution and micro acid solution. It can be recycled and resistant to high temperature.
4. The pump has low noise and slight vibration.
5. The volume of the pump is small, which is suitable for the usage of the inside and outside design of tank.

Product Superiority

1. It is made of 304 or 316 stainless steel, with compact and firm structure. The interior and exterior appearance of the body is balanced and smooth.
2. The impeller has been corrected for dynamic balance, with low noise and low vibration rate;
3. The use of dry liquid seal can ensure that the motor and bearing are not corroded by chemical gas, so as to prolong the service life of the motor and pump;
4. It is equipped with high-end foreign brand motors, with high efficiency and low noise;
5. The pump shaft is integrated with motor and rotor to ensure the accuracy and stability of operation.


QHV - 25SK-0.5/25SK-1/40SK-1/40SK-2/50SK-2/50SK-3 50SK-5/65SK-3/65SK-5/80SK-7.5/80SK-10/100SK-7.5 100SK-10/100SK-15/100SK-20/125SK-15/125SK-20

● Max.Flow: 2633 L/min


● Max.Head: 31 m

Performance Curve


QHV-25SK-0.5

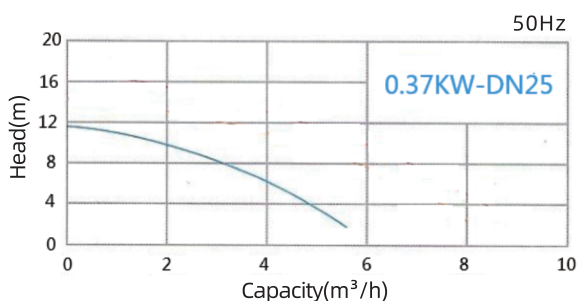


QHV-25SK-1

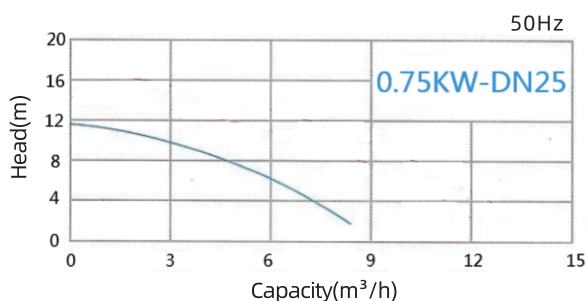


QHV-40SK-1

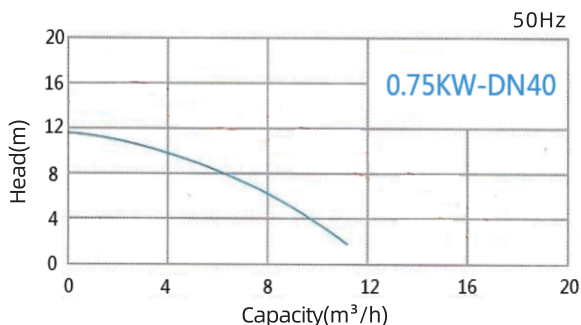


QHV-40SK-2

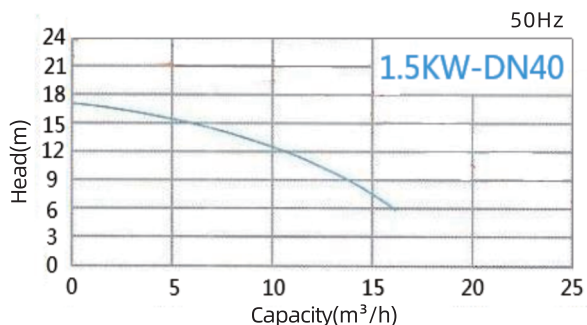


QHV-50SK-2

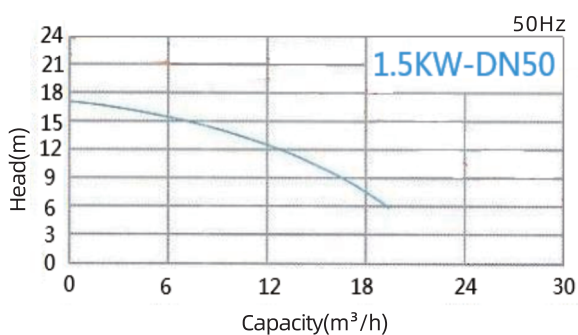


QHV-50SK-3

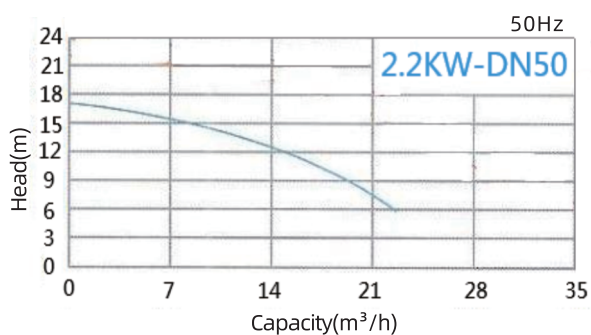


QHV-50SK-5

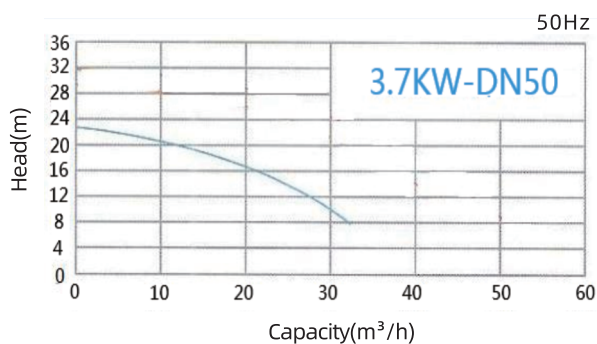


QHV-65SK-3

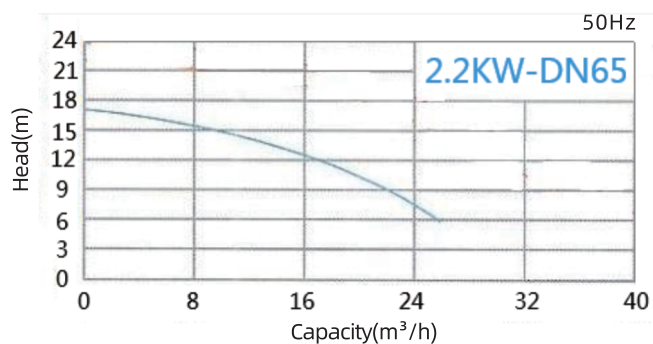


QHV-65SK-5

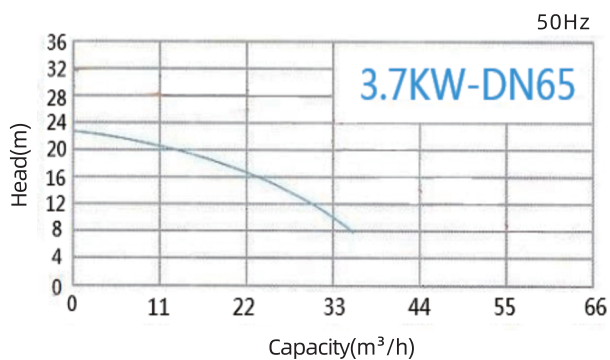


QHV-80SK-7.5

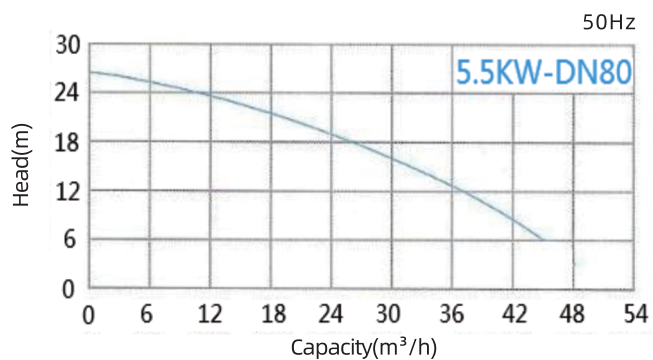


QHV-80SK-10

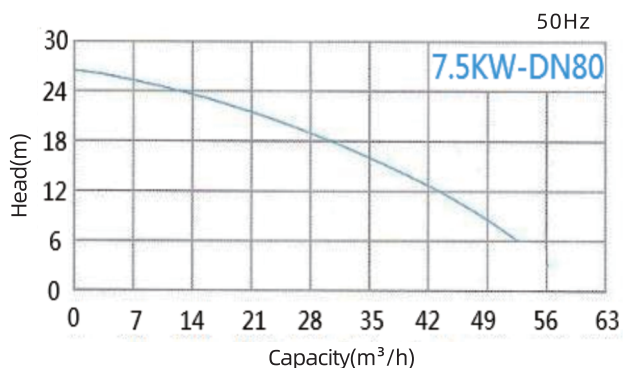


QHV-100SK-7.5

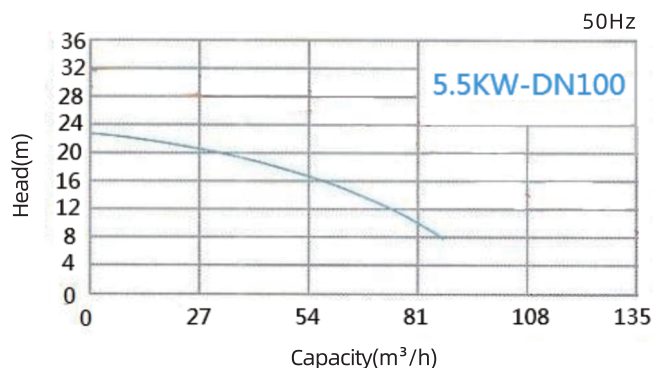


QHV-100SK-10

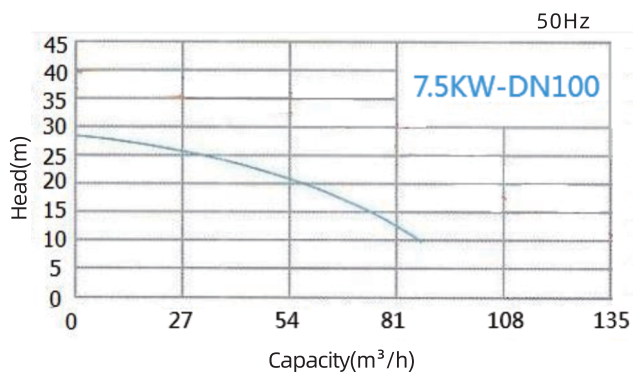


QHV-100SK-15

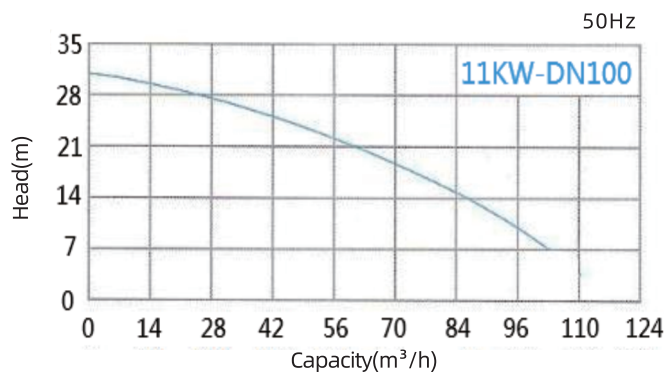


QHV-100SK-20

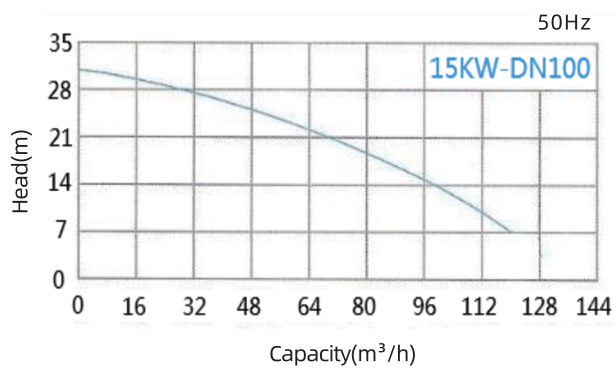


QHV-125SK-15

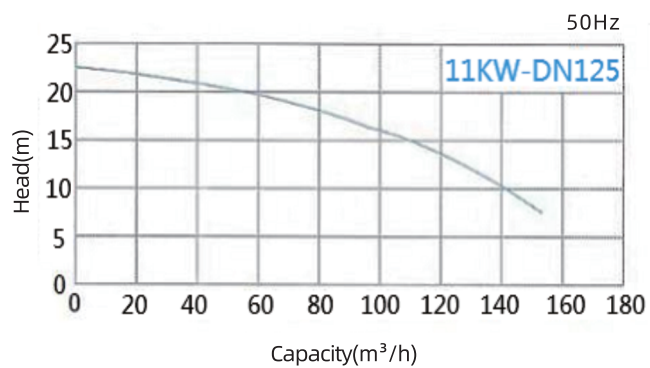

QHV-125SK-20

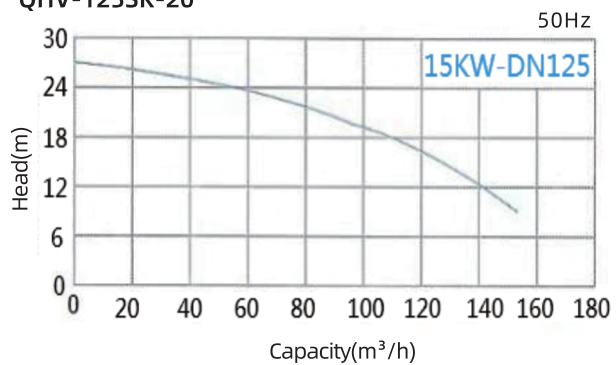


Overall Dimensions

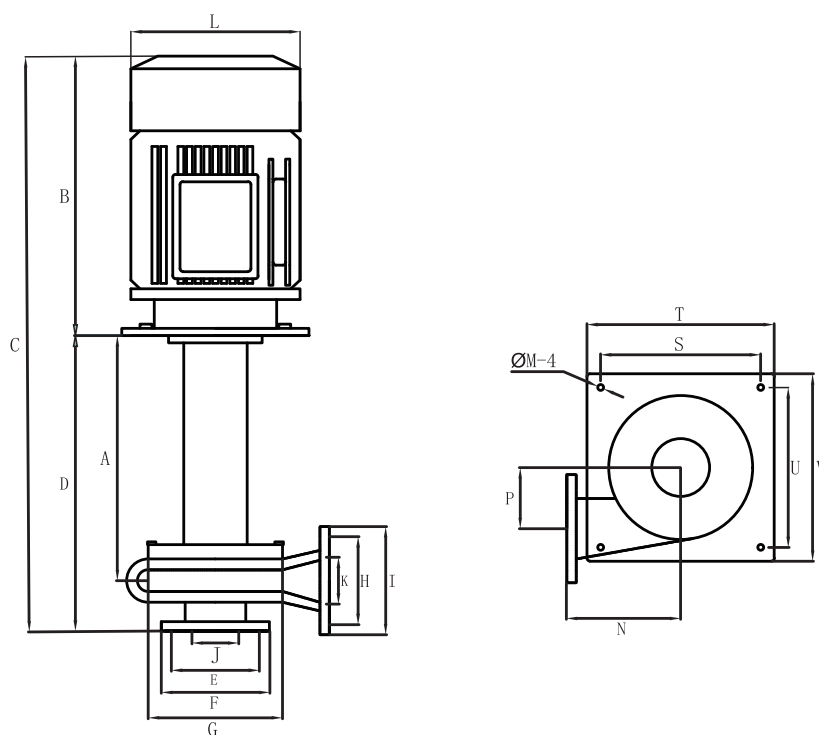

Model	Horse Power HP	A	B	C	D	J	E	F	G	K	H	I	L	M	S	T	U	V	P	N
QHV-25SK-0.5	0.5	258	300	558	260	25	78	93	150	25	78	93	170	15	150	210	180	210	70	107
QHV-25SK-1	1	258	300	558	260	25	78	93	150	25	78	93	170	15	150	210	180	210	70	107
QHV-40SK-1	1	258	300	558	260	40	78	93	150	40	78	93	170	15	150	210	180	210	70	107
QHV-40SK-2	2	340	390	730	335	40	95	118	180	40	95	118	200	15	222	260	222	260	82	107
QHV-50SK-2	2	340	390	730	335	50	95	118	180	50	95	118	200	15	222	260	222	260	82	107
QHV-50SK-3	3	340	390	730	335	50	95	118	180	50	95	118	200	15	222	260	222	260	82	107
QHV-65SK-3	3	340	410	750	335	65	122	150	200	65	122	150	200	15	222	260	222	260	85	158
QHV-50SK-5	5	340	410	750	388	50	122	150	200	50	122	150	235	15	222	260	222	260	85	158
QHV-65SK-5	5	340	410	750	388	65	122	150	200	65	122	150	235	15	222	260	222	260	85	158
QHV-80SK-7.5	7.5	350	420	770	420	80	122	150	230	80	122	150	280	15	300	350	300	350	100	154
QHV-80SK-10	10	350	420	770	420	80	122	150	230	80	122	150	280	15	300	350	300	350	100	154
QHV-100SK-7.5	7.5	365	440	805	420	100	175	210	240	100	175	210	280	15	300	350	300	350	106	163
QHV-100SK-10	10	365	440	805	420	100	175	210	240	100	175	210	280	15	300	350	300	350	106	163
QHV-100SK-15	15	395	480	875	513	100	175	210	270	100	175	210	316	15	300	350	300	350	122	167
QHV-100SK-20	20	395	480	875	513	100	175	210	270	100	175	210	316	15	300	350	300	350	122	167
QHV-125SK-15	15	403	495	898	513	125	210	250	270	125	210	250	316	15	300	350	300	350	128	210
QHV-125SK-20	20	403	495	898	513	125	210	250	270	125	210	250	316	15	300	350	300	350	128	210

Installation Diagram

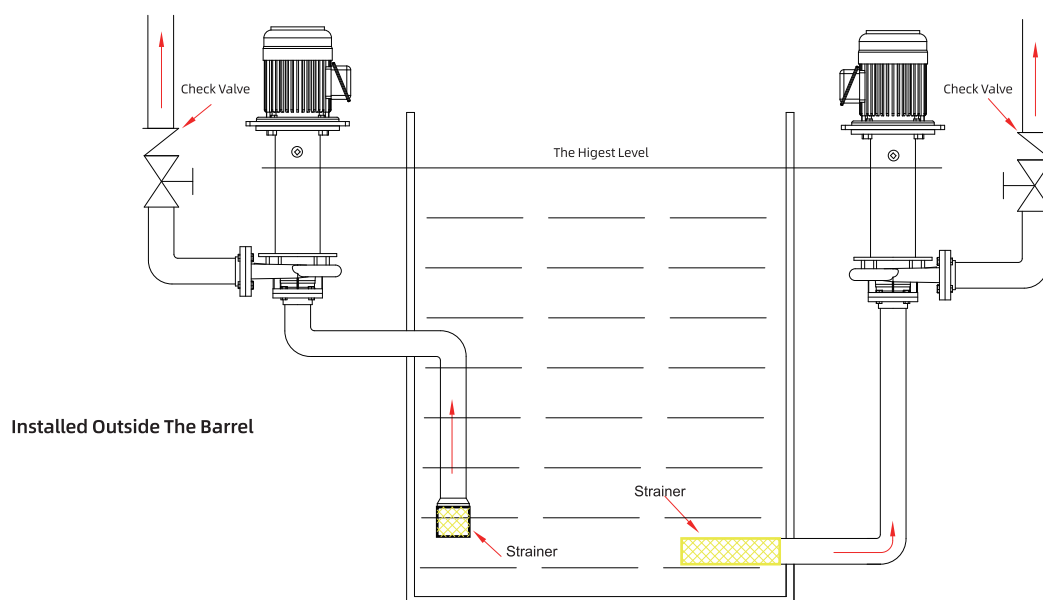

Attentions

1. If it is used in chemical plant or environment with volatile gas, it is necessary to select the safe and explosion-proof Eg3 or D2g4 motor;
2. Filter screen shall be installed at the inlet pipe to prevent foreign matters from being inhaled, which may cause damage to the pump;
3. If the outlet pipe is higher than the motor, a check valve shall be installed at the highest point of the liquid level to prevent the motor from being damaged;
4. The mixing of different types of chemical solution may cause chemical reaction, even high heat, which may damage the pump. Therefore, do not use the same pump to transport different chemical solutions.





www.qeehuapump.com



www.qeehua-pump.com

HEAD OFFICE IN SOUTH CHINA:

GUANGDONG QEEHUA INDUSTRY EQUIPMENT CO., LTD.

Address: No.8, East Chenwu Road, Houjie Town, Dongguan City, Guangdong Province, China.

SUBSIDIARY CORPORATION:

DONGGUAN EVER POPULAR IMPORT AND EXPORT CO., LTD.

No. 1301&1302, Tianan Cyber Park, No.1 Huangjin Road, Nancheng District,
Dongguan City, Guangdong Province, China.

SUBSIDIARY CORPORATION:

JIANGXI QEEHUA FLOW TECHNOLOGY CO., LTD.

Address: Room 110, Building 3, Hengke Industrial Park phase 1,
Economic and Technological Development Zone, Ganzhou City, Jiangxi Province, China.

SUBSIDIARY CORPORATION:

SUZHOU QEEHUA PUMP INDUSTRY CO., LTD.

Address: Room 221, Kezheng Building, No. 16, Nantiancheng Road, High - speed Railway New Town,
Xiangcheng District, Suzhou City.

SUBSIDIARY CORPORATION:

CHENGDU QEEHUA FLUID TECHNOLOGY CO., LTD.

No. 08, 3rd Floor, Building 3, No. 1108 Shengbang Street, High tech Zone, Chengdu City, Sichuan Province, China.



Copyright belongs to our company

Product specifications and technical indicators are subject to change without prior notice.

2025.09.20